


Stoppo B


→ Value for money and quality. These are the roots of the new STOPPY B bollards. The result of a careful market survey looking into the assembly techniques and design details that led to the production of a simple bollard that responds to customer needs without neglecting the quality requirements that have always marked BFT products. All at a competitive price. STOPPY B comes in two models: the first, STOPPY B Ø115-500, has a Ø115 mm, 500 mm high rod. It has no light crown but is fitted with a rear-reflecting strip. The second, STOPPY B Ø200-700, has a Ø200 mm, 700mm high rod, a light crown and a rear-reflecting strip.



STOPPY B Ø115/500

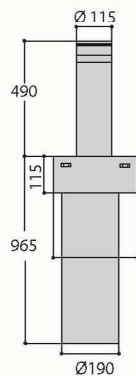

STOPPY B Ø200/700

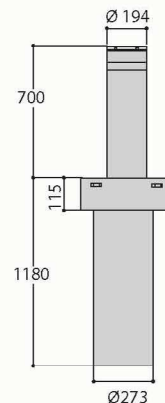

PERSEO CBD dedicated control panel: manages up to 4 bollards in parallel, programming menu on the display, integrated heating element and incorporated receiver.

Main accessories: RME 1 BT 24V metal mass detector, one channel / RME 2 230V metal mass detector, two channels/ SPIRA 2x1 magnetic coil 2x1 m

TECHNICAL CHARACTERISTICS

| | STOPPY B Ø115/500 | STOPPY B Ø200/700 |
|-----------------------|---------------------------------------|---------------------------------------|
| Supply voltage | 230V ± 1 0% 50/60 Hz | 230V ± 1 0% 50/60 Hz |
| Hand operated | Manual | Manual |
| External control unit | External mod. PERSEO CBD | External mod. PERSEO CBD |
| Work type | 500 movements/day | 500 movements/day |
| Rising time | 7 seconds | 9 seconds |
| Protection rating | IP 67 | IP 67 |
| Impact resistance | 6,000 JOULES | 6,000 JOULES |
| Break-in proof | 60,000 JOULES | 60,000 JOULES |
| Operating temperature | - 20° C + 60° C | - 20° C + 60° C |
| Movement | With slow down on opening and closing | With slow down on opening and closing |